


AP
500
800
1200




Breathe
pure air
inside the
buildings

ZONAIR3D
AIR PRO
500
800
1200

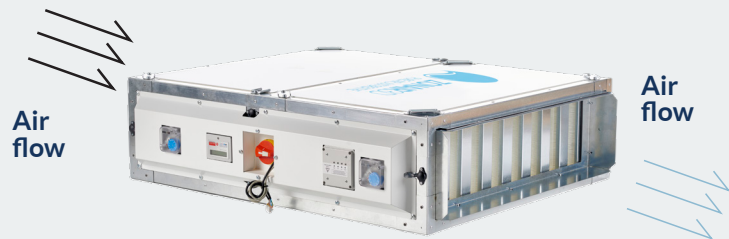

3 FILTERS + FAN + CONTROL

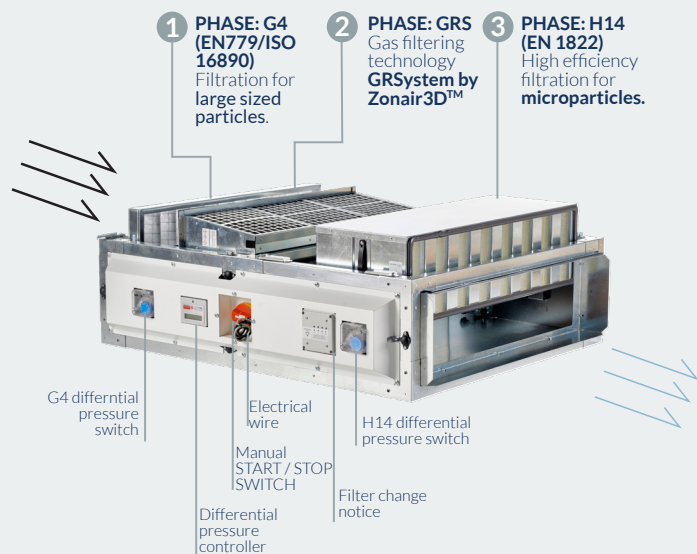

Particle filter	EN779 Average arrestance (Am) compared with test dust in %	EN1822 MPPS (0,08- 0,15µm)	ISO 16890 Coarse		
G4	< 90%	-	60%		
H14	-	> 99,995%	-		
Gas filter	Gas reduction at the first pass				
	O ₃	SO _x	NO _x	H ₂ S	HCHO
GRSYSTEM HEALTHCARE	100%	80%	80%	80%	60%

Technical characteristics

	Air Pro 500	Air Pro 800	Air Pro 1200
Flow (m³/h)	500	800	1200
Device Measures H X W X L (mm)	310 x 972 x 1104	310 x 972 x 1104	353 x 972 x 1104
Weight (Kg)	84	85	92
Consumption (kW)	0,164	0,328	0,518
Voltage and Frequency	230V - 50/60Hz	230V - 50/60Hz	230V - 50/60Hz
Filtration Stages	G4 - GRS - H14	G4 - GRS - H14	G4 - GRS - H14
Available Pressure (Pa)	303	245	390
Pressure Sound 3m (dB)	44.8	51.7	58.1

EC fans according to Erp regulations (Energy related products directive).

AIR PRO 500, 800 and 1200

Air Pro 500 / 800 / 1200 are innovative air purification systems that bring pure air to **building interior**. Through the air extraction system of the building, purified air is 'exhaled' outdoors, converting these buildings into a **lung for the cities** and urban centers.

- Spaces **free of environmental ozone**.
- Eliminates **99,995% of the pollutant particles** harmful to health.
- **Reduces toxic**, irritant and carcinogenic gases at **comfort levels**.

Air Pro system has been designed to meet air purification needs in spaces ranging from scope spaces domestic and residential to tertiary. They can be adapted in all sorts of installations, whether in newly-built constructions, renovated buildings or prefabricated.

It comprises **3 FILTRATION STAGES**: **Pre filter G4** for large particles (PM10), **absolute filter HEPA (H14)** for removing microparticulates (PM 0,1), with nanofibres virucidal, and the exclusive gas filter **GRSystem by Zonair3D™**, through which the gases are reduced to comfort levels.

